





D - Rings

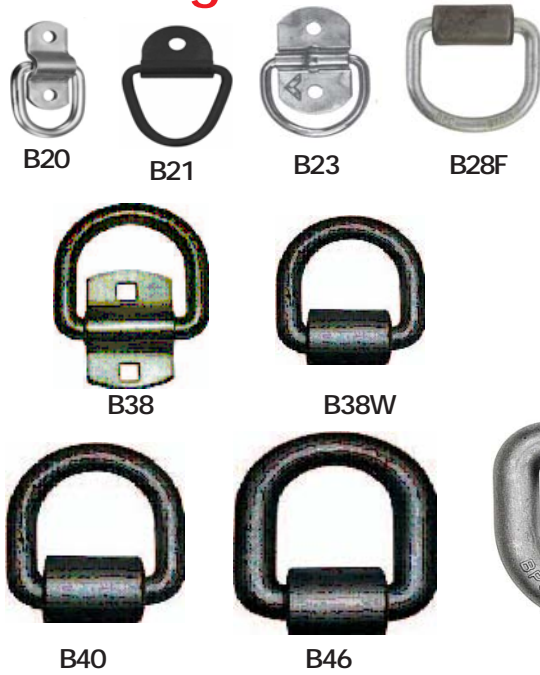

Part #	Safe Working Load	Size	Bolt/Weld
B20 Rope Ring	800 LB	1/4"	BOLT
B21 Rope Ring	800 LB	1/4"	BOLT
B23 Rope Ring	400 LB	1/4"	BOLT
B28 Rope Ring	1000 LB	3/8"	WELD
B38 Lashing Ring	4080 LB	1/2"	BOLT
B38W Lashing Ring	4080 LB	1/2"	WELD
B40 Lashing Ring	6130 LB	5/8"	WELD
B46 Lashing Ring	9120 LB	3/4"	WELD
B48 Lashing Ring	15586 LB	1"	WELD
B50 Lashing Ring	15586 LB	1"	WELD
B5055 Lashing Ring	15586 LB	1"	WELD

Rope Rings

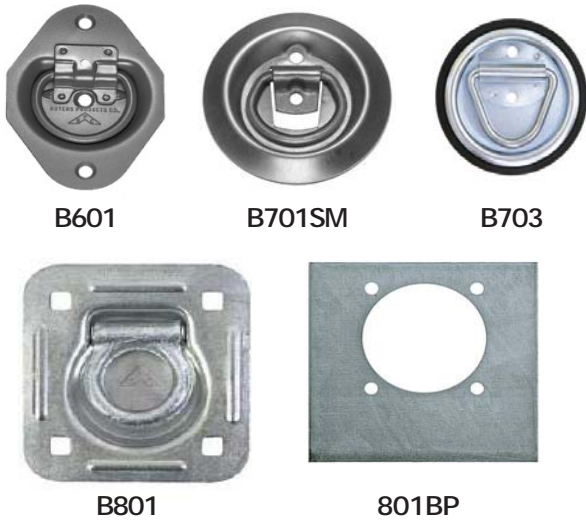

Part #	Safe Working Load	Size	Bolt/Weld
B601 Recessed Requires 3" dia mounting hole	285 LB	1/4"	BOLT
B701SM Surface Mount	265 LB	1/4"	BOLT
B703 Recessed with plastic bezel	500 LB	1/4"	BOLT
B801 Recessed Heavy-Duty 3-5/8" dia hole	2000 LB		BOLT
801BP Plated Back Support Plate			

Latches



B2598H
5/8" Heat Treated Pin, Spring loaded can be locked in the open position.

Tipper Latch



382-0201

- Designed for tilt bed trailers
- Ideal for boat, snowmobile, or utility trailers that tilt
- Automatic latching
- Holds tilt bed securely while towing

Spring Latch

B2595LKB
1/2" Spring Latch w/Keeper
B2596KZ
3/4" Spring Latch w/Keeper
B2596
3/4" Spring Latch
B2575
1/2" Spring Latch



B2575



B2595LKB



B2596