


**T-35 3500 LB. Straight Beam (2.375" x .180" tube)**  
**D-35 3500 LB. 4" Drop Beam (2.375" x .180" tube)**



**Options:**

- U-Lube Spindles
- 4" Drop Spindle
- 3" Tube
- Electric or Hydraulic Brakes
- Available in 545, 5475, 550, 555, and 655 BP

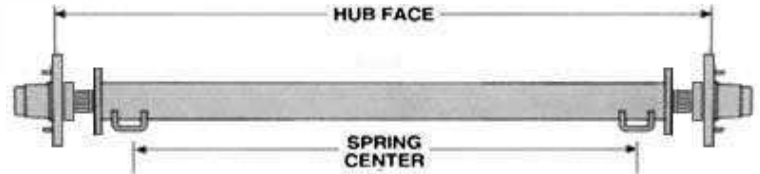

Recommended Spacing for Difference  
Between Hub Face & Spring Center

Axle Type	Minimum	Maximum
STRAIGHT	11.25"	17.00"
DROP	14.88"	19.00"

Notes: Minimums are based on manufacturing tolerances only.  
Some tire and wheel combinations may create interference.

- SADDLE 7602
- NUT SN100
- WASHER SW100
- COTTER PIN 19-2

**U-BOLT KITS**  
**U-BOLT & AXLE PLATES**

- U101 2-3/8" ROUND U-BOLTS SHORT
- U102 2-3/8" ROUND U-BOLTS LONG

**ATTACHING PARTS**  
**KIT**

- 60190102WB SINGLE HANGER KIT
- 60191201WB TANDEM HANGER KIT

**SPRINGS**

- AWS3 26" 3000LB
- AWS4 26" 4000LB
- AWS5 26" 5000LB
- SW4B 25.25" 3500LB

**AEZ545UHS**



**HUB GROUP**

- 363191 HUB
- L44649 BEARING
- LM68149 BEARING
- 10-19 SEAL
- 21-41-1 CAP
- 85-1 PLUG
- X1023R NUT

**A655UHS**



**HUB GROUP**

- 363195 HUB
- L44649 BEARING
- LM68149 BEARING
- 10-19 SEAL
- 46749 CAP
- X1023R NUT

**A545UHIDS**



**HUB/DRUM GROUP**

- 363219 HUB/DRUM
- L44649 BEARING
- LM68149 BEARING
- 10-19 SEAL
- 46749 CAP
- X1023R NUT

**AEZ655UHIDS**



**HUB/DRUM GROUP**

- 363222 HUB/DRUM
- L44649 BEARING
- LM68149 BEARING
- 10-19 SEAL
- 21-41-1 CAP
- 85-1 PLUG
- X1023R NUT

**AEZ545UHIDS**



- 363219 HUB/DRUM
- L44649 BEARING
- LM68149 BEARING
- 10-19 SEAL
- 21-41-1 CAP
- 85-1 PLUG
- X1023R NUT

**A550UHS**



**HUB GROUP**

- 363194 HUB
- L44649 BEARING
- LM68149 BEARING
- 10-19 SEAL
- 46749 CAP
- X1023R NUT