

T-52, T-60 #42 Straight Axle Beam (3.00" x .180" tube)

T-70 #42 Straight Axle Beam (3.00" x .250" tube)


D-52, D-60 #42 4" Drop Axle Beam (3.00" x .180" tube)

D-70 #42 4" Drop Axle Beam (3.00" x .250" tube)



Options: **AL-KO**

- U-Lube Spindles
- 6-5.5" OR 8-6.5" Bolt Pattern
- Electric Brakes
- Hydraulic Brakes

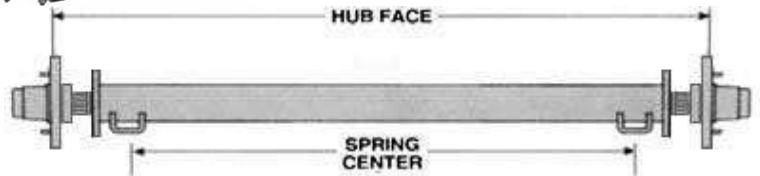

Recommended Spacing for Difference
Between Hub Face & Spring Center *

Axle Type	Minimum	Maximum
STRAIGHT	13.00"	19.50"
DROP	17.00"	20.50"
7K DROP	17.00"	19.50"

* 1/4" INCREMENTS ONLY

Notes: Minimums are based on manufacturing tolerances only.
Some tire and wheel combinations may create interference.

SADDLE 5.2K	7603
SADDLE 6K,7K	7626
NUT	SN100
WASHER	SW100
COTTER PIN	19-2

U-BOLT KITS

U-BOLT & AXLE PLATES

U103	3" ROUND U-BOLT KIT SHORT
U105	3" ROUND U-BOLT KIT LONG 1 KIT PER AXLE

ATTACHING PARTS KIT

60190102WB	SINGLE HANGER KIT
60191201WB	TANDEM HANGER KIT
60193101WB	TRIPLE HANGER KIT

SPRINGS (PR)


AWS5	26" 5000LB
AWS6	26" 6000LB
AWS7	26" 7000LB
ML4	25.125" 6000LB
SW6	25.25" 7000LB



A13HRMID HUB/DRUM GROUP



AEZ865S HUB GROUP

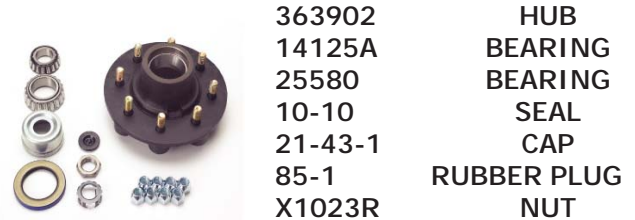

A13HRMI HUB GROUP



A865D HUB/DRUM GROUP

