





## D - Rings

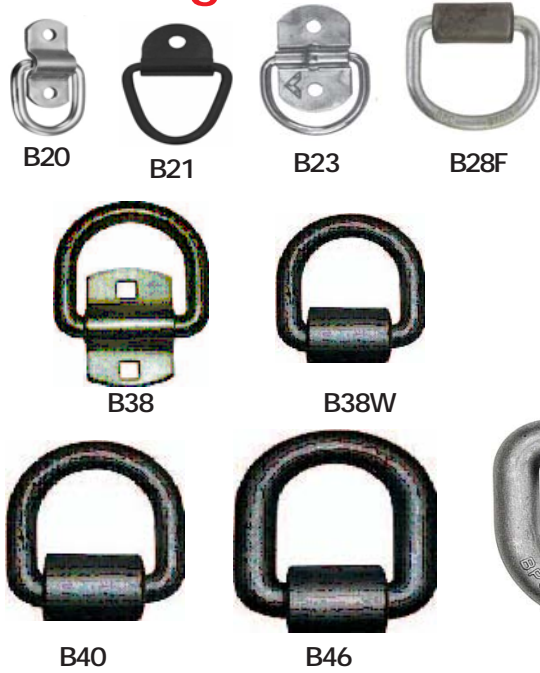

| Part #             | Safe Working Load | Size | Bolt/Weld |
|--------------------|-------------------|------|-----------|
| B20 Rope Ring      | 800 LB            | 1/4" | BOLT      |
| B21 Rope Ring      | 800 LB            | 1/4" | BOLT      |
| B23 Rope Ring      | 400 LB            | 1/4" | BOLT      |
| B28 Rope Ring      | 1000 LB           | 3/8" | WELD      |
| B38 Lashing Ring   | 4080 LB           | 1/2" | BOLT      |
| B38W Lashing Ring  | 4080 LB           | 1/2" | WELD      |
| B40 Lashing Ring   | 6130 LB           | 5/8" | WELD      |
| B46 Lashing Ring   | 9120 LB           | 3/4" | WELD      |
| B48 Lashing Ring   | 15586 LB          | 1"   | WELD      |
| B50 Lashing Ring   | 15586 LB          | 1"   | WELD      |
| B5055 Lashing Ring | 15586 LB          | 1"   | WELD      |

## Rope Rings

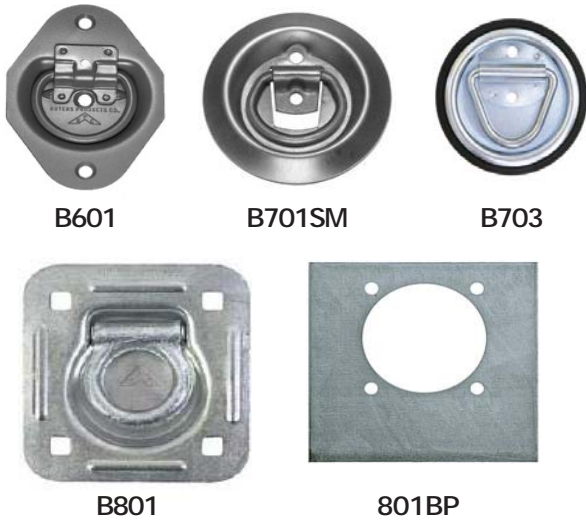

| Part #  | Safe Working Load | Size | Bolt/Weld |
|---|-------------------|------|-----------|
| <b>B601 Recessed</b><br>Requires 3" dia mounting hole | 285 LB            | 1/4" | BOLT      |
| <b>B701SM</b><br>Surface Mount                        | 265 LB            | 1/4" | BOLT      |
| <b>B703 Recessed</b><br>with plastic bezel            | 500 LB            | 1/4" | BOLT      |
| <b>B801 Recessed</b><br>Heavy-Duty<br>3-5/8" dia hole | 2000 LB           |      | BOLT      |
| <b>801BP Plated</b><br>Back Support<br>Plate          |                   |      |           |

## Latches



**B2598H**  
5/8" Heat Treated Pin, Spring loaded can be locked in the open position.

### Tipper Latch



**TL382**

- Designed for tilt bed trailers
- Ideal for boat, snowmobile, or utility trailers that tilt
- Automatic latching
- Holds tilt bed securely while towing

### Spring Latch

**B2595LKB**  
1/2" Spring Latch w/Keeper  
**B2596KZ**  
3/4" Spring Latch w/Keeper  
**B2596LKB**  
3/4" Spring Latch w/Keeper  
**B2575**  
1/2" Spring Latch  
**B2595SH**  
1/2" Spring Latch w/short



B2575



B2595LKB



B2596