

*T-20 500-2200 LB. Straight Beam (1.75" x .180" tube)*  
*T-20 500-2200 LB. Axle Assembly (1.75" x .180" tube)*




SADDLE 7610  
 NUT SN100  
 WASHER SW100  
 COTTER PIN 19-2

### Options:

- U-Lube Spindles
- 4-4" OR 5-4.5" Bolt Pattern
- Straight (2.375" X .180" Tube)\*
- Electric Brakes
- Hydraulic Brakes
- \*SPECIAL ORDER

Recommended Spacing for Difference  
Between Hub Face & Spring Center

Axle Type	Minimum	Maximum
IDLER 1-3/4"	10.00"	15.25"
BRAKE 1-3/4"	11.75"	15.25"
IDLER 2-3.8"	11.75"	20"
BRAKE 2-3/8"	11.75"	20"

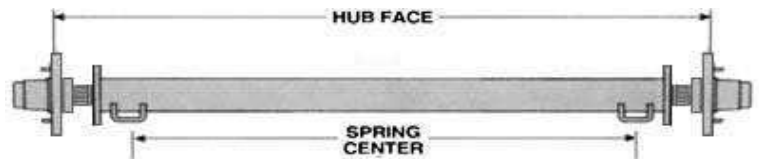

Notes: Minimums are based on manufacturing tolerances only.  
 Some tire and wheel combinations may create interference.

**U-BOLT KITS**  
**U-BOLT & AXLE PLATES**

U100	1-3/4" ROUND U-BOLTS
U101	2-3/8" ROUND U-BOLTS

**ATTACHING PARTS KIT**

60190102WB	SINGLE HANGER KIT
60191201WB	TANDEM HANGER KIT

**SPRINGS**

AWS2	26" 1500LB
8117	20.25" 2000LB

**AEZH44-9 HUB GROUP FOR AXLES**



363185	4-4" HUB BEARING
L44649	SEAL
10-60	GREASE CAP
21-41-1	RUBBER PLUG
85-1	RUBBER PLUG
X1023R	LUG NUTS

**AEZH545-9 HUB GROUP FOR AXLES**



363188	SM FACE HUB BEARING
L44649	SEAL
10-60	GREASE CAP
21-41-1	RUBBER PLUG
85-1	RUBBER PLUG
X1023R	LUG NUTS

**SH545-9 HUB GROUP FOR SPINDLES**



363188	SM FACE HUB BEARING
L44649	SEAL
46750	GREASE CAP
46749	RUBBER PLUG
X1023R	LUG NUTS

**SH545-13-9 HUB GROUP FOR SPINDLES**



363190	LRG FACE HUB BEARING
L44649	SEAL
46750	GREASE CAP
46749	RUBBER PLUG
X1023R	LUG NUTS

**SH44-9 HUB GROUP FOR SPINDLES**



363185	HUB BEARING
L44649	SEAL
46750	GREASE CAP
46749	RUBBER PLUG
X1023R	LUG NUTS

**363216 7" BRAKE DRUM**



363215	4-4	7 x 1-1/4"
363216	5-4.5	7 x 1-1/4"
8-173-16	4-4	7 x 1-1/4" Electric
8-276-5	4-4	7 x 1-3/4" Hydraulic
8-257-5	5-4.5	7 x 1-1/4" Electric
8-271-7	5-4.5	7 x 1-3/4" Hydraulic